



### FEATURES

- Efficiency to 79%
- Wide temperature performance at full 1 Watt load, -40°C up to 105°C
- Single or dual outputs
- UL60950 recognised for functional insulation<sup>2</sup>
- Industry standard pinout
- Power sharing on dual outputs
- 3kVDC isolation (1 minute) 'Hi-Pot Test'
- 5V, 12V & 15V inputs
- 5V, 9V, 12V & 15V outputs
- Internal SMD construction
- No external components required
- MTF up to 4.2 million hours
- No electrolytic or tantalum capacitors
- Pin compatible with MEV1, MEV3 & NMK series

### PRODUCT OVERVIEW

The NMV series of industrial temperature range DC-DC converters are the standard building blocks for on-board distributed power systems. They are ideally suited for providing local supplies on control system boards with the added benefit of 3kVDC galvanic isolation to reduce switching noise. Available in SIP and DIP with dual and single output pinout. All of the rated power may be drawn from a single pin provided the total load does not exceed 1 watt.

### SELECTION GUIDE

Order Code	Nominal Input Voltage	Output Voltage	Output Current	Input Current at Rated Load	Load Regulation (Typ)	Load Regulation (Max)	Ripple & Noise (Typ)	Ripple & Noise (Max)	Efficiency	Isolation Capacitance	MTTF <sup>1</sup>		Recommended Alternative
	V	V	mA	mA	%	%	mVp-p	mVp-p	%	pF	MIL. kWhrs	Tel. kWhrs	
							Recommended						
								In Production					
NMV0505DAC	5	5	200	294	14.6	15	15	17	68	23	4241		
NMV0515DAC	5	15	67	256	6.7	7.3	8.7	11	78	27	1838		
NMV0505SAC	5	5	200	294	14.6	15	16	23	68	23	4241		
NMV0505TSAC	5	5	200	240	7.7	10	20	40	74	30	3785	76148	
NMV0509SAC	5	9	111	267	9.3	10	12	15	75	30	3376		
NMV0512SAC	5	12	84	260	7.4	8.0	11	15	77	26	2555		
NMV0515SAC	5	15	67	256	6.7	7.3	11	14	78	27	1838		
NMV1205DAC	12	5	200	121	14.6	15	9.5	14	69	26	2664		
NMV1205SAC	12	5	200	121	14.6	15	11	16	69	26	2664		
NMV1212SAC	12	12	84	108	7.4	8.0	9	22	77	43	1883		
NMV1215SAC	12	15	67	108	6.7	7.3	8.5	17	77	42	1462		
NMV0505DC	5	±5	±100	280	9.0	10	11	14	71.5	21	3106		
NMV0505SC	5	±5	±100	280	9.0	10	11	17	71.5	21	3106		
NMV0512SC	5	±12	±42	256	6.8	7.5	6.7	8	78	26	1579		
NMV0512TSC	5	±12	±42	240	4.9	7	15	30	78	50	2655	11212	
NMV0515SC	5	±15	±33	253	6.8	8.5	6.3	8.2	79	27	1065		
NMV1215DC	12	±15	±33	110	6.8	8.5	5.5	8	76	41	924		
NMV1212SC	12	±12	±42	111	6.8	7.5	6	10	75	42	1287		
NMV1215SC	12	±15	±33	110	6.8	8.5	6.5	13	76	41	924		
NMV1515SC	15	±15	±33	84	2.3	3.0	7.5	9	77	84	522		
To be discontinued													
NMV0509DAC	5	9	111	267	9.3	10	11.3	15	75	30	3376		MEV1S0509SC
NMV0509SC	5	±9	±55	263	7.5	8.5	7	9.4	76	24	2258		MEJ1D0509SC
NMV0512DC	5	±12	±42	256	6.8	7.5	6.7	9	78	26	1579		MEJ1D0512SC
NMV0515DC	5	±15	±33	253	6.8	8.5	6	9	79	27	1065		MEV1D0512SC
NMV1205DC	12	±5	±100	117	9.0	10	8.6	12	71	27	2148		MEV1D1205SC
NMV1205SC	12	±5	±100	117	9.0	10	10	13	71	27	2148		MEV1D1205SC
NMV1209SAC	12	9	111	113	9.3	10	7.5	14	74	35	2295		MEV1S1209SC
NMV1209SC	12	±9	±55	113	7.5	8.5	8	11	74	35	1705		MEJ1D1209SC
NMV1212DAC	12	12	84	108	7.4	8.0	8	19	77	43	1883		MEV1S1212SC
NMV1512SC	15	±12	±42	87	2.6	3.0	7.5	9	75	68	789		Contact Murata
NMV1515SAC	15	15	67	84	2.8	4.0	11	13	77	50	941		MEV1S1515SC
Discontinued													
NMV0512DAC	5	12	84	260	7.4	8.0	10.5	16	77	26	2555		MEV1S0512DC
NMV1209DAC	12	9	111	113	9.3	10	7	8.5	74	35	2295		MEV1S1209SC
NMV1215DAC	12	15	67	108	6.7	7.3	8	17	77	42	1462		MEV1S1215DC
NMV1505SAC	15	5	200	93	8.3	10	15.5	17	67	21	2747		MEV1S1505SC
NMV1512SAC	15	12	84	85	3.3	4.0	11.2	14	75	45	1365		Contact Murata
NMV0509DC	5	±9	±55	263	7.5	8.5	7.5	9	76	24	2258		NKA0509SC
NMV1209DC	12	±9	±55	113	7.5	8.5	6.5	9	74	35	1705		NKA1209SC
NMV1212DC	12	±12	±42	111	6.8	7.5	6.2	8.5	75	42	1287		MEV1D1212SC
NMV1505SC	15	±5	±100	91	5.5	10	11	12	69	39	1941		Contact Murata



For full details go to <https://www.murata.com/en-global/products/power/rohs>



1. Calculated using MIL-HDBK-217 FN2 and Telcordia SR-332 calculation model with nominal input voltage at full load.  
 2. The NMV0505TSAC & NMV0512TSC are pending recognition to UL62368-1.  
 All specifications typical at T<sub>a</sub>=25°C, nominal input voltage and rated output current unless otherwise specified.

INPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	Continuous operation, 5V input types	4.5	5	5.5	V
	Continuous operation, 12V input types	10.8	12	13.2	
	Continuous operation, 15V input types	13.5	15	16.5	
Reflected ripple current	NMV0505TSAC & NMV0512TSC		5		mA p-p
	All other output types		20	40	

OUTPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	T <sub>A</sub> =-40°C to 120°C, see derating graph			1	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High V <sub>IN</sub> to low V <sub>IN</sub>	All output types		1.0	1.2
		NMV0505TSAC & NMV0512TSC		1.1	1.2

ISOLATION CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 minute	3000			VDC
Resistance	Viso= 1000VDC	10			GΩ

GENERAL CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	NMV0505TSAC		55		kHz
	NMV0512TSC		60		
	5V input types		120	135	
	12V input types		150	170	
	15V input types		90	110	

TEMPERATURE CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	NMV0505TSAC & NMV0512TSC	-40		105	°C
	All other output types	-40		85	
Storage		-50		125	
Case Temperature above ambient	NMV0505TSAC		16		
	NMV0512TSC		14		
	5V output types			28	
	All other output types			25	
Cooling	Free air convection				

ABSOLUTE MAXIMUM RATINGS	
Lead temperature 1.5mm from case for 10 seconds	260°C
Wave Solder	Wave Solder profile not to exceed the profile recommended in IEC 61760-1 Section 6.1.3. Please refer to <a href="#">application notes</a> for further information.
Input voltage V <sub>IN</sub> , NMV05 types	7V
Input voltage V <sub>IN</sub> , NMV12 types	15V
Input voltage V <sub>IN</sub> , NMV15 types	18V

## TECHNICAL NOTES

### ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions NMV series of DC-DC converters are all 100% production tested at their stated isolation voltage. This is 3kVDC for 1 minute.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

The NMV has been recognised by Underwriters Laboratory for functional insulation, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

### REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The NMV series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enamelled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognised parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

## SAFETY APPROVAL

The NMV series has been recognised by Underwriters Laboratory (UL) to UL 60950 for functional insulation. The NMV0505TSAC & NMV0512TSC are pending recognition to UL62368-1.

The NMV Series of converters are not internally fused so to meet the requirements of UL 60950 an anti-surge input line fuse should always be used with ratings as defined below.

NMV05xxxxC: 0.5A

NMV12xxxxC: 0.2A

NMV15xxxxC: 0.2A

All fuses should be UL recognised and rated to at least the maximum allowable DC input voltage.

File number E151252 applies.


## RoHS COMPLIANCE INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. Please refer to [application notes](#) for further information. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.

For further information, please visit [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

## PART NUMBER STRUCTURE

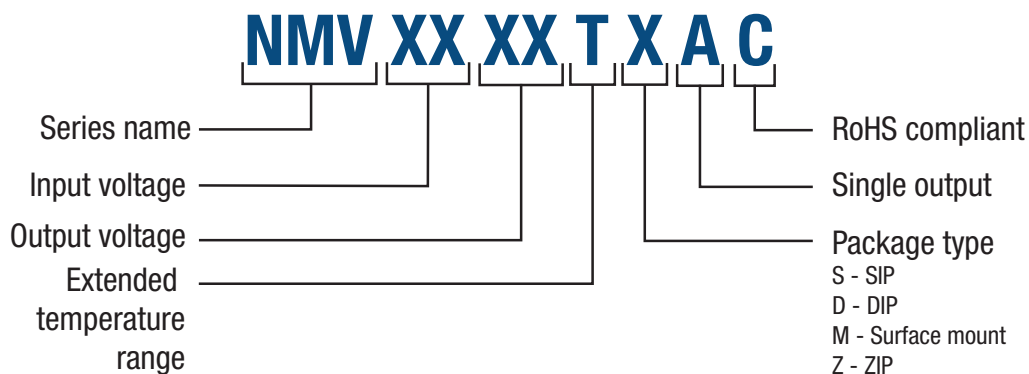


## CHARACTERISATION TEST METHODS

### Ripple & Noise Characterisation Method

Ripple and noise measurements are performed with the following test configuration.

C1	1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC-DC converter
C2	10µF tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC-DC converter with an ESR of less than 100mΩ at 100 kHz
C3	100nF multilayer ceramic capacitor, general purpose
R1	450Ω resistor, carbon film, ±1% tolerance
R2	50Ω BNC termination
T1	3T of the coax cable through a ferrite toroid
RLOAD	Resistive load to the maximum power rating of the DC-DC converter. Connections should be made via twisted wires
Measured values are multiplied by 10 to obtain the specified values.	

### Differential Mode Noise Test Schematic

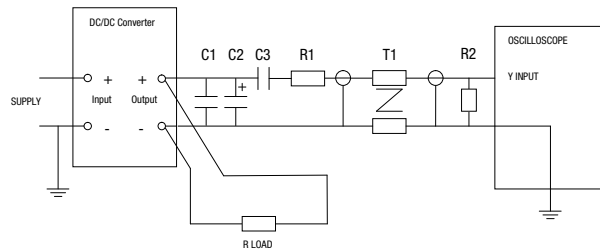

## APPLICATION NOTES

### Minimum load

The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically double the specified output voltage if the output load falls to less than 5%.


### Capacitive loading and start up

Typical start up times for this series, with a typical input voltage rise time of 2.2µs and output capacitance of 10µF, are shown in the table below. The product series will start into a capacitance of 47µF with an increased start time, however, the maximum recommended output capacitance is 10µF.

	Start-up time µs
NMV0505TSAC	215
NMV0505xC	1966
NMV0509xC	5360
NMV0512xC	11180
NMV0515xC	16270
NMV0512TSC	2300
NMV1205xC	1290

	Start-up time µs
NMV1209xC	4140
NMV1212xC	8650
NMV1215xC	11171
NMV1505xC	803
NMV1512xC	3510
NMV1515xC	8361

Typical Start-Up Wave Form



## APPLICATION NOTES (Continued)


### Output Ripple Reduction

By using the values of inductance and capacitance stated, the output ripple at the rated load is lowered to 5mV p-p max.

#### Component selection

**Capacitor:** It is required that the ESR (Equivalent Series Resistance) should be as low as possible, ceramic types are recommended. The voltage rating should be at least twice (except for 15V output), the rated output voltage of the DC-DC converter.




**Inductor:** The rated current of the inductor should not be less than that of the output of the DC-DC converter. At the rated current, the DC resistance of the inductor should be such that the voltage drop across the inductor is <2% of the rated voltage of the DC-DC converter. The SRF (Self Resonant Frequency) should be >20MHz.

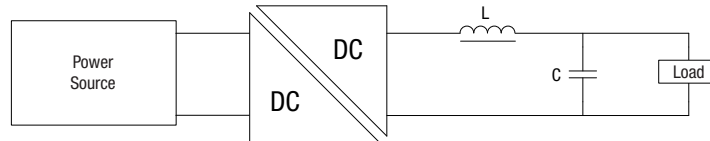

	Inductor			Capacitor
	L, $\mu$ H	SMD	Through Hole	C, $\mu$ F
NMV0505TSAC	22	84223C	11R223C	22
NMV0505xC	22	82223C	11R223C	1
NMV0509xC	100	82104C	11R104C	0.47
NMV0512TSC	10	82103C	11R103C	22
NMV0512xC	150	82154C	11R154C	0.33
NMV0515xC	220	82224C	11R224C	0.22
NMV1205xC	22	82223C	11R223C	2.2
NMV1209xC	100	82104C	11R104C	1
NMV1212xC	150	82154C	11R154C	0.33
NMV1215xC	220	82224C	11R224C	0.22
NMV1505xC	22	82223C	11R223C	1
NMV1512xC	150	82154C	11R154C	0.33
NMV1515xC	220	82224C	11R224C	0.22


## TOLERANCE ENVELOPES

The voltage tolerance envelope shows typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading.

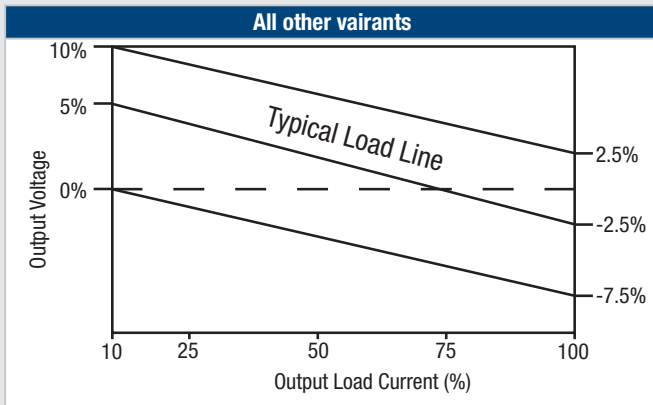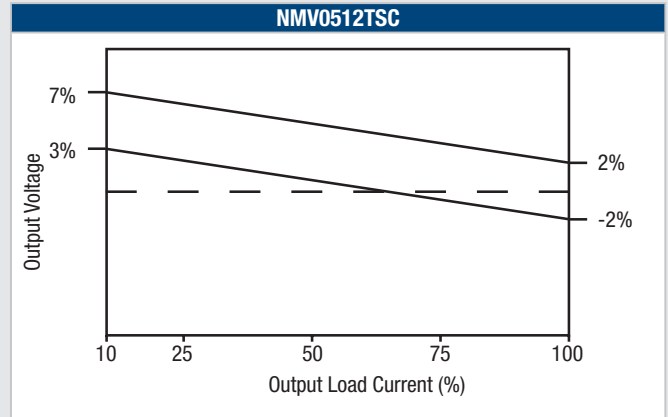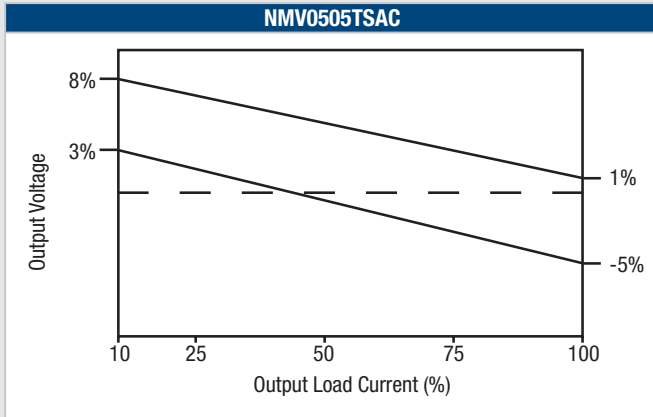


## TEMPERATURE DERATING GRAPH

NMV0505TSAC & NMV0512TSC:

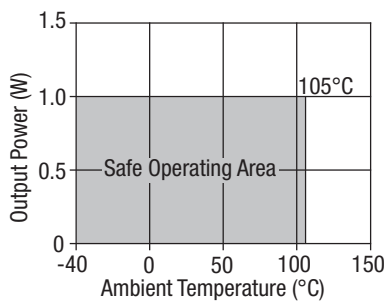


All other variants:

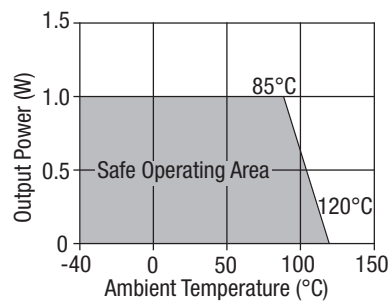


## EFFICIENCY VS LOAD

**NMV0505TSAC**

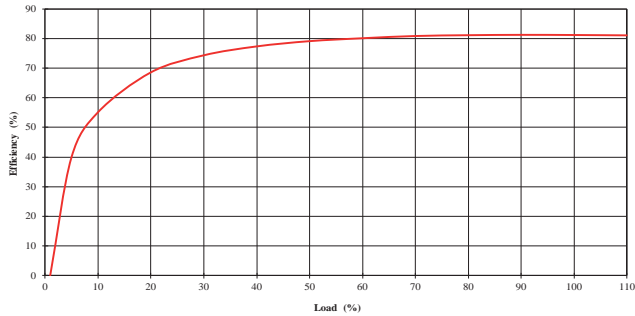


**NMV0512TSC**

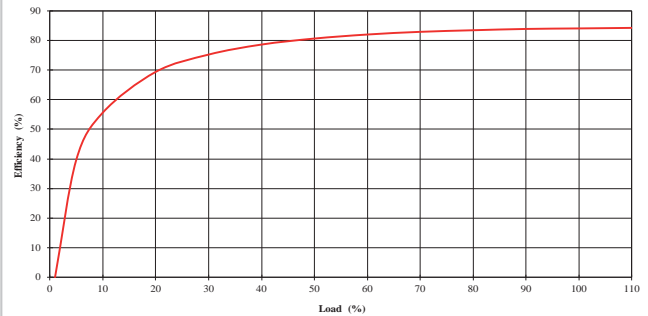

## EMC FILTERING AND SPECTRA


### FILTERING

The following filter circuit and filter table shows the input filters typically required to meet conducted emissions limits for EN 55022 curve B using Quasi-Peak and average detectors according to CISPR 22.

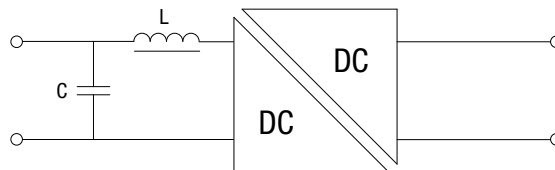


Part Number	Inductor		Capacitor	
	L, $\mu\text{H}$	SMD	C, $\mu\text{F}$	SMD
<b>NMV0505TSAC</b>	10 $\mu\text{H}$	23100C	2.2 $\mu\text{F}$	GRM188C71E225KE11D
<b>NMV0512TSC</b>	10 $\mu\text{H}$	23100C	2.2 $\mu\text{F}$	GRM188C71E225KE11D

**NMV0505TSAC (Quasi-Peak)**

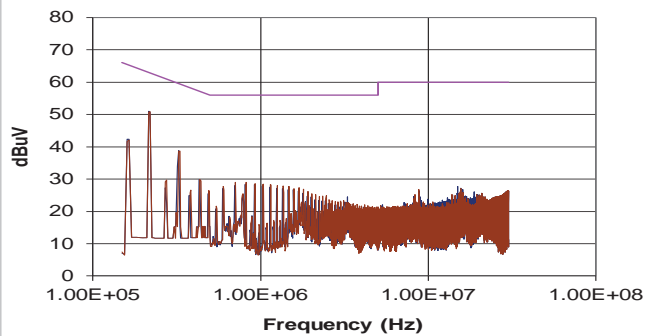


**NMV0505TSAC (Average)**

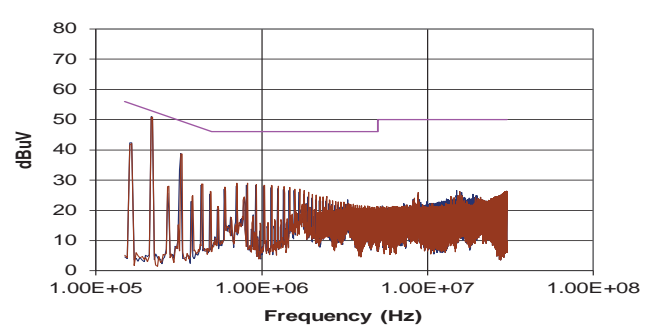


**EMC FILTERING AND SPECTRA (Continued)**

**NMV0512TSC (Quasi-Peak)**

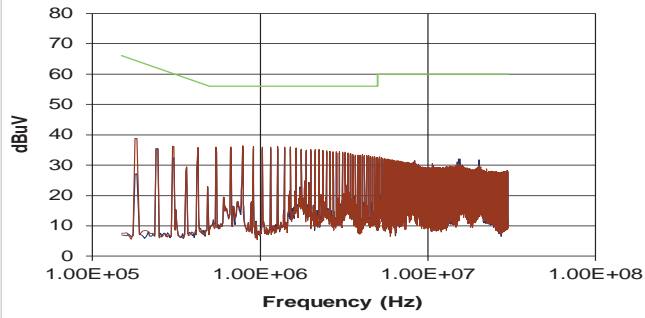

**NMV0512TSC (Average)**

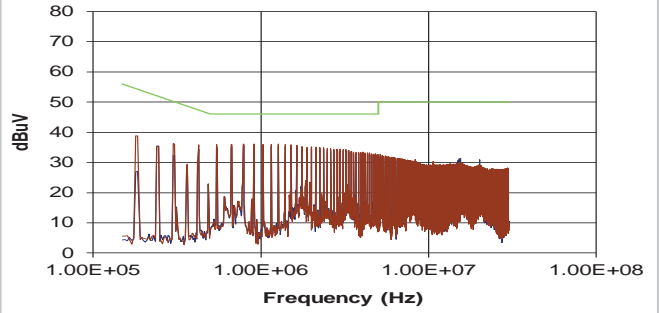





**PACKAGE SPECIFICATIONS**

**MECHANICAL DIMENSIONS**

**DIP package**

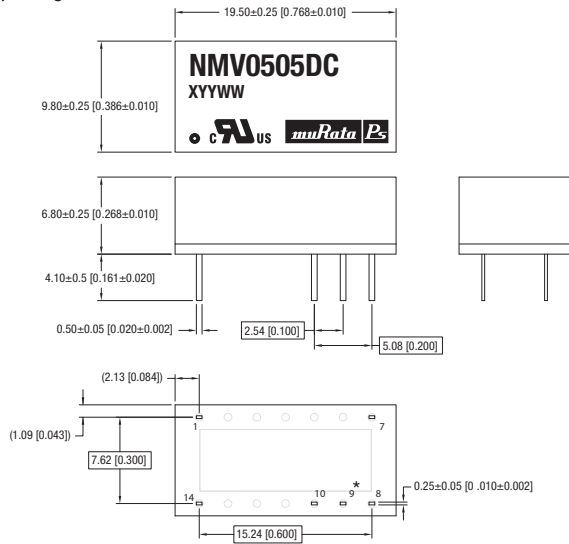

**SIP package**

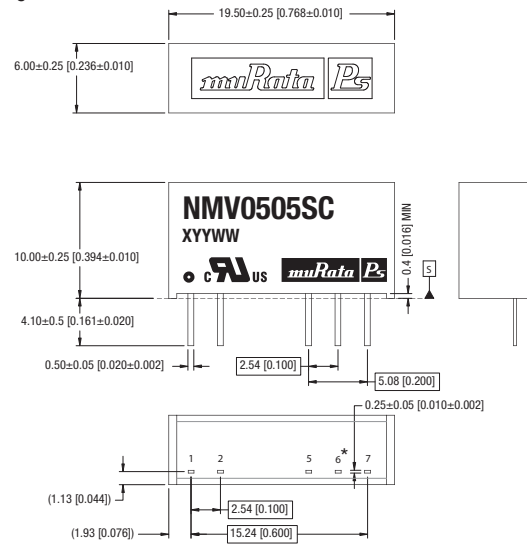

\* Pin not fitted on single output variants.  
 All dimensions in mm (inches) Controlling dimension is mm.  
 All pins on a 2.54 (0.100) pitch and within ±0.1 (0.004) of true position from pin 1 at seating plane 'S'  
 For SIP products, from date code D2224 onwards, products have an embossed logo on the top of the case.  
 Prior to this date, SIP products have a flat surface finish.

Weight: 2.4g (DIP) 2.1g (SIP)

**PIN CONNECTIONS**

**Single output variants**



14 Pin DIP		7 Pin SIP	
Pin	Function	Pin	Function
1	-VIN	1	+VIN
7	NC	2	-VIN
8	+VOUT	5	-VOUT
10	-VOUT	7	+VOUT
14	+VIN		

**Dual output variants**

14 Pin DIP		7 Pin SIP	
Pin	Function	Pin	Function
1	-VIN	1	+VIN
7	NC	2	-VIN
8	+VOUT	5	-VOUT
9	OV	6	OV
10	-VOUT	7	+VOUT
14	+VIN		

**PACKAGE SPECIFICATIONS (Continued)**


**RECOMMENDED FOOTPRINT DETAILS**

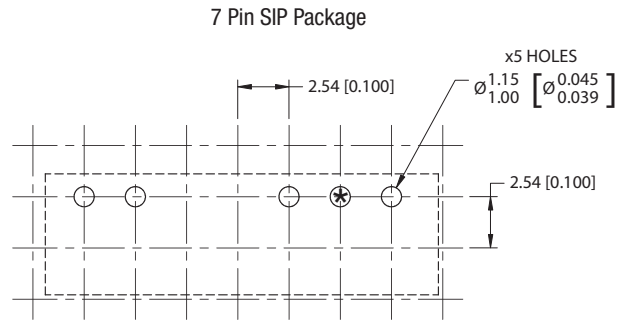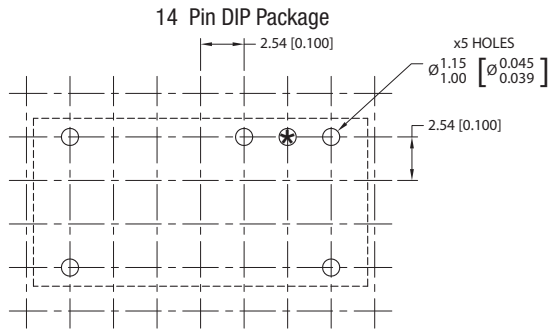


\*Hole not required for single output variants.

**TUBE OUTLINE DIMENSIONS**

**14 Pin DIP Tube**

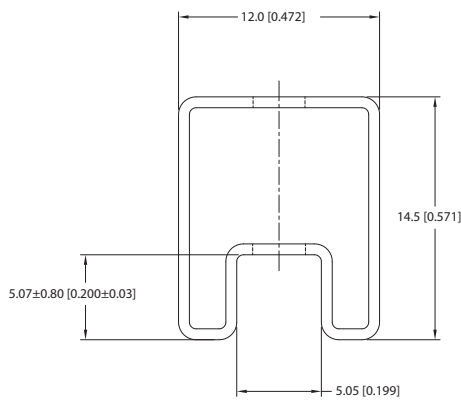

**7 Pin SIP Tube**

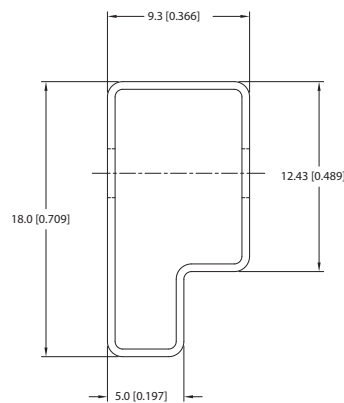

Unless otherwise specified all dimensions in mm [inches]  $\pm 0.55\text{mm}$  [0.022]. Tube length  
 (14 Pin DIP) : 520mm [20.472]  $\pm 2.0$  [0.079].  
 Tube length (7 Pin SIP) : 520mm [20.472]  $\pm 2.0$  [0.079].

Tube Quantity : 25

**DISCLAIMER**

Unless otherwise stated in the datasheet, all products are designed for standard commercial and industrial applications and NOT for safety-critical and/or life-critical applications.

Particularly for safety-critical and/or life-critical applications, i.e. applications that may directly endanger or cause the loss of life, inflict bodily harm and/or loss or severe damage to equipment/property, and severely harm the environment, a prior explicit written approval from Murata is strictly required. Any use of Murata standard products for any safety-critical, life-critical or any related applications without any prior explicit written approval from Murata shall be deemed unauthorised use.

These applications include but are not limited to:

- Aircraft equipment
- Aerospace equipment
- Undersea equipment
- Power plant control equipment
- Medical equipment
- Transportation equipment ( automobiles, trains, ships, etc.)
- Traffic signal equipment
- Disaster prevention / crime prevention equipment
- Data Processing equipment

Murata makes no express or implied warranty, representation, or guarantee of suitability, fitness for any particular use/purpose and/or compatibility with any application or device of the buyer, nor does Murata assume any liability whatsoever arising out of unauthorised use of any Murata product for the application of the buyer. The suitability, fitness for any particular use/purpose and/or compatibility of Murata product with any application or device of the buyer remain to be the responsibility and liability of the buyer.

Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm, and take appropriate remedial actions. Buyer will fully indemnify and hold Murata, its affiliated companies, and its representatives harmless against any damages arising out of unauthorised use of any Murata products in any safety-critical and/or life-critical applications.

Remark: Murata in this section refers to Murata Manufacturing Company and its affiliated companies worldwide including, but not limited to, Murata Power Solutions.



This product is subject to the following [operating requirements](https://www.murata.com/en-eu/products/power/requirements) and the [Life and Safety Critical Application Sales Policy](https://www.murata.com/en-eu/products/power/requirements):

Refer to: <https://www.murata.com/en-eu/products/power/requirements>

Murata Power Solutions (Milton Keynes) Ltd. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.  
© 2022 Murata Power Solutions (Milton Keynes) Ltd