

Kingtronics®

KKT

3mm Ceramic Trimmer Capacitor SMD

FEATURES

- ◆ Low capacitance drift.
- ◆ High durability from vibration, dust, moisture and flux.
- ◆ Color coded case permits easy identification
- ◆ Very good Q and high resonant frequency
- ◆ Designed for reflow soldering.
- ◆ Small size with external dimension of 3.2(W) x 4.5(L) x 1.5(T) mm

Ultra-thin miniature SMD type Chip Trimmer Capacitors for miniaturization of electronic equipment.

Very thin dustproof structure and very low capacity drift after adjustment,

Are most suited to the fine adjustment of items. The plastic is good mechanical strength

and is a high temperature liquid-crystal polymer with dielectric loss.

RATINGS AND CHARACTERISTICS

Item \ Part No	KKT303TR	KKT306TR	KKT310TR	KKT320TR	KKT330TR
	3pF	6pF	10pF	20pF	30pF
	Black	Blue	Ivory	Pink	Green
Model					
Capacitance(pF Min)	1.5 MAX	2.0 MAX	3.0 MAX	5.5 MAX	8.0MAX
Capacitance(pF Max)	3.0 ⁺⁵⁰ -0%	6.0 ⁺⁵⁰ -0%	10.0 ⁺⁵⁰ -0%	20.0 ⁺⁵⁰ -0%	28.5 ⁺⁵⁰ -0%
Capacitance Drift (Max)	±2%	±2%	±2%	±3%	±3%
Temperature Coefficient (ppm/°C)	NPO±300	NPO±200	N600±400	N900±400	N1300±400
Q Value (at 1 Mhz, C max)	300min	500 min	700 min	500 min	250 min
DC Working Voltage	100 VDC	100 VDC	100 VDC	100 VDC	100 VDC
DC Withstanding Voltage	220 VDC	220 VDC	220 VDC	220 VDC	220 VDC
Insulation Resistance	10 ⁴ MΩMin				
Operating Temperature	-25°C to 85°C				
Rotation Torque	15 ~ 72 gf.cm				

Kingtronics® International Company

Website: www.kingtronics.com

Email: info@kingtronics.com

Tel: (852) 8106 7033


Fax: (852) 8106 7099

Kingtronics®


KKT

3mm Ceramic Trimmer Capacitor SMD

DIMENSIONS (mm)

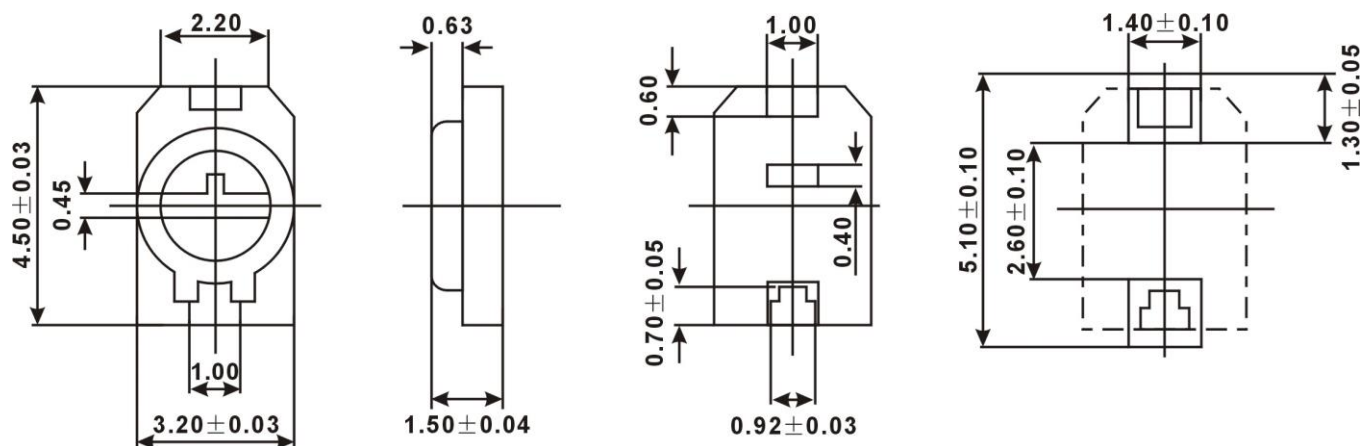

TAPE & REEL SPECIFICATIONS (mm)

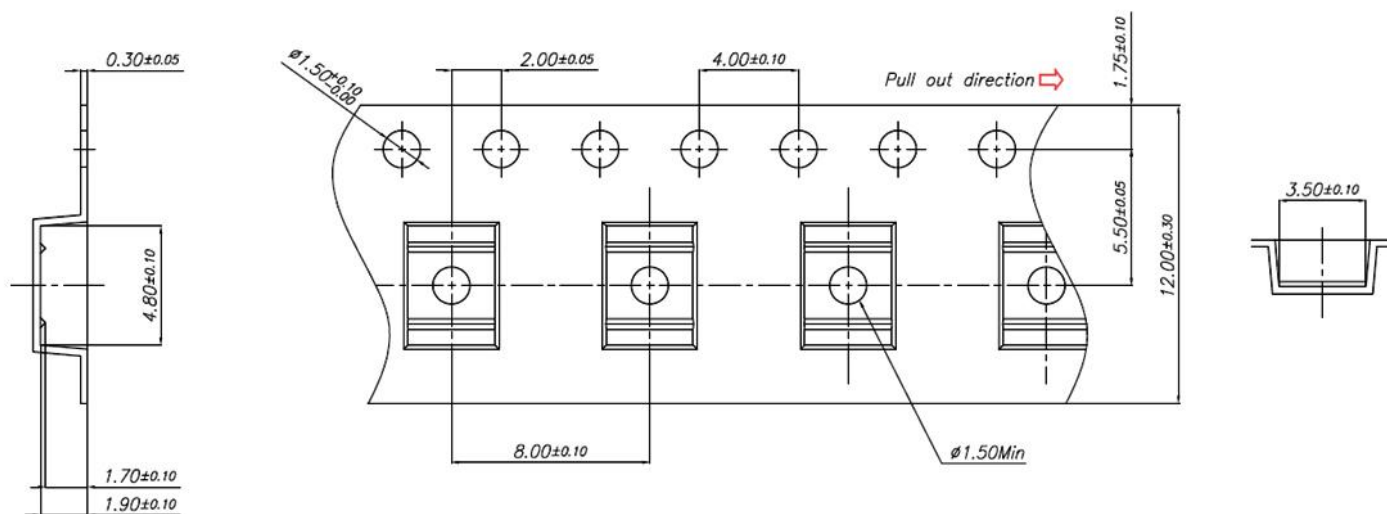

Note: Specifications are subject to change without notice.

Kingtronics® International Company

Website: www.kingtronics.com

Email: info@kingtronics.com

Tel: (852) 8106 7033

Fax: (852) 8106 7099