



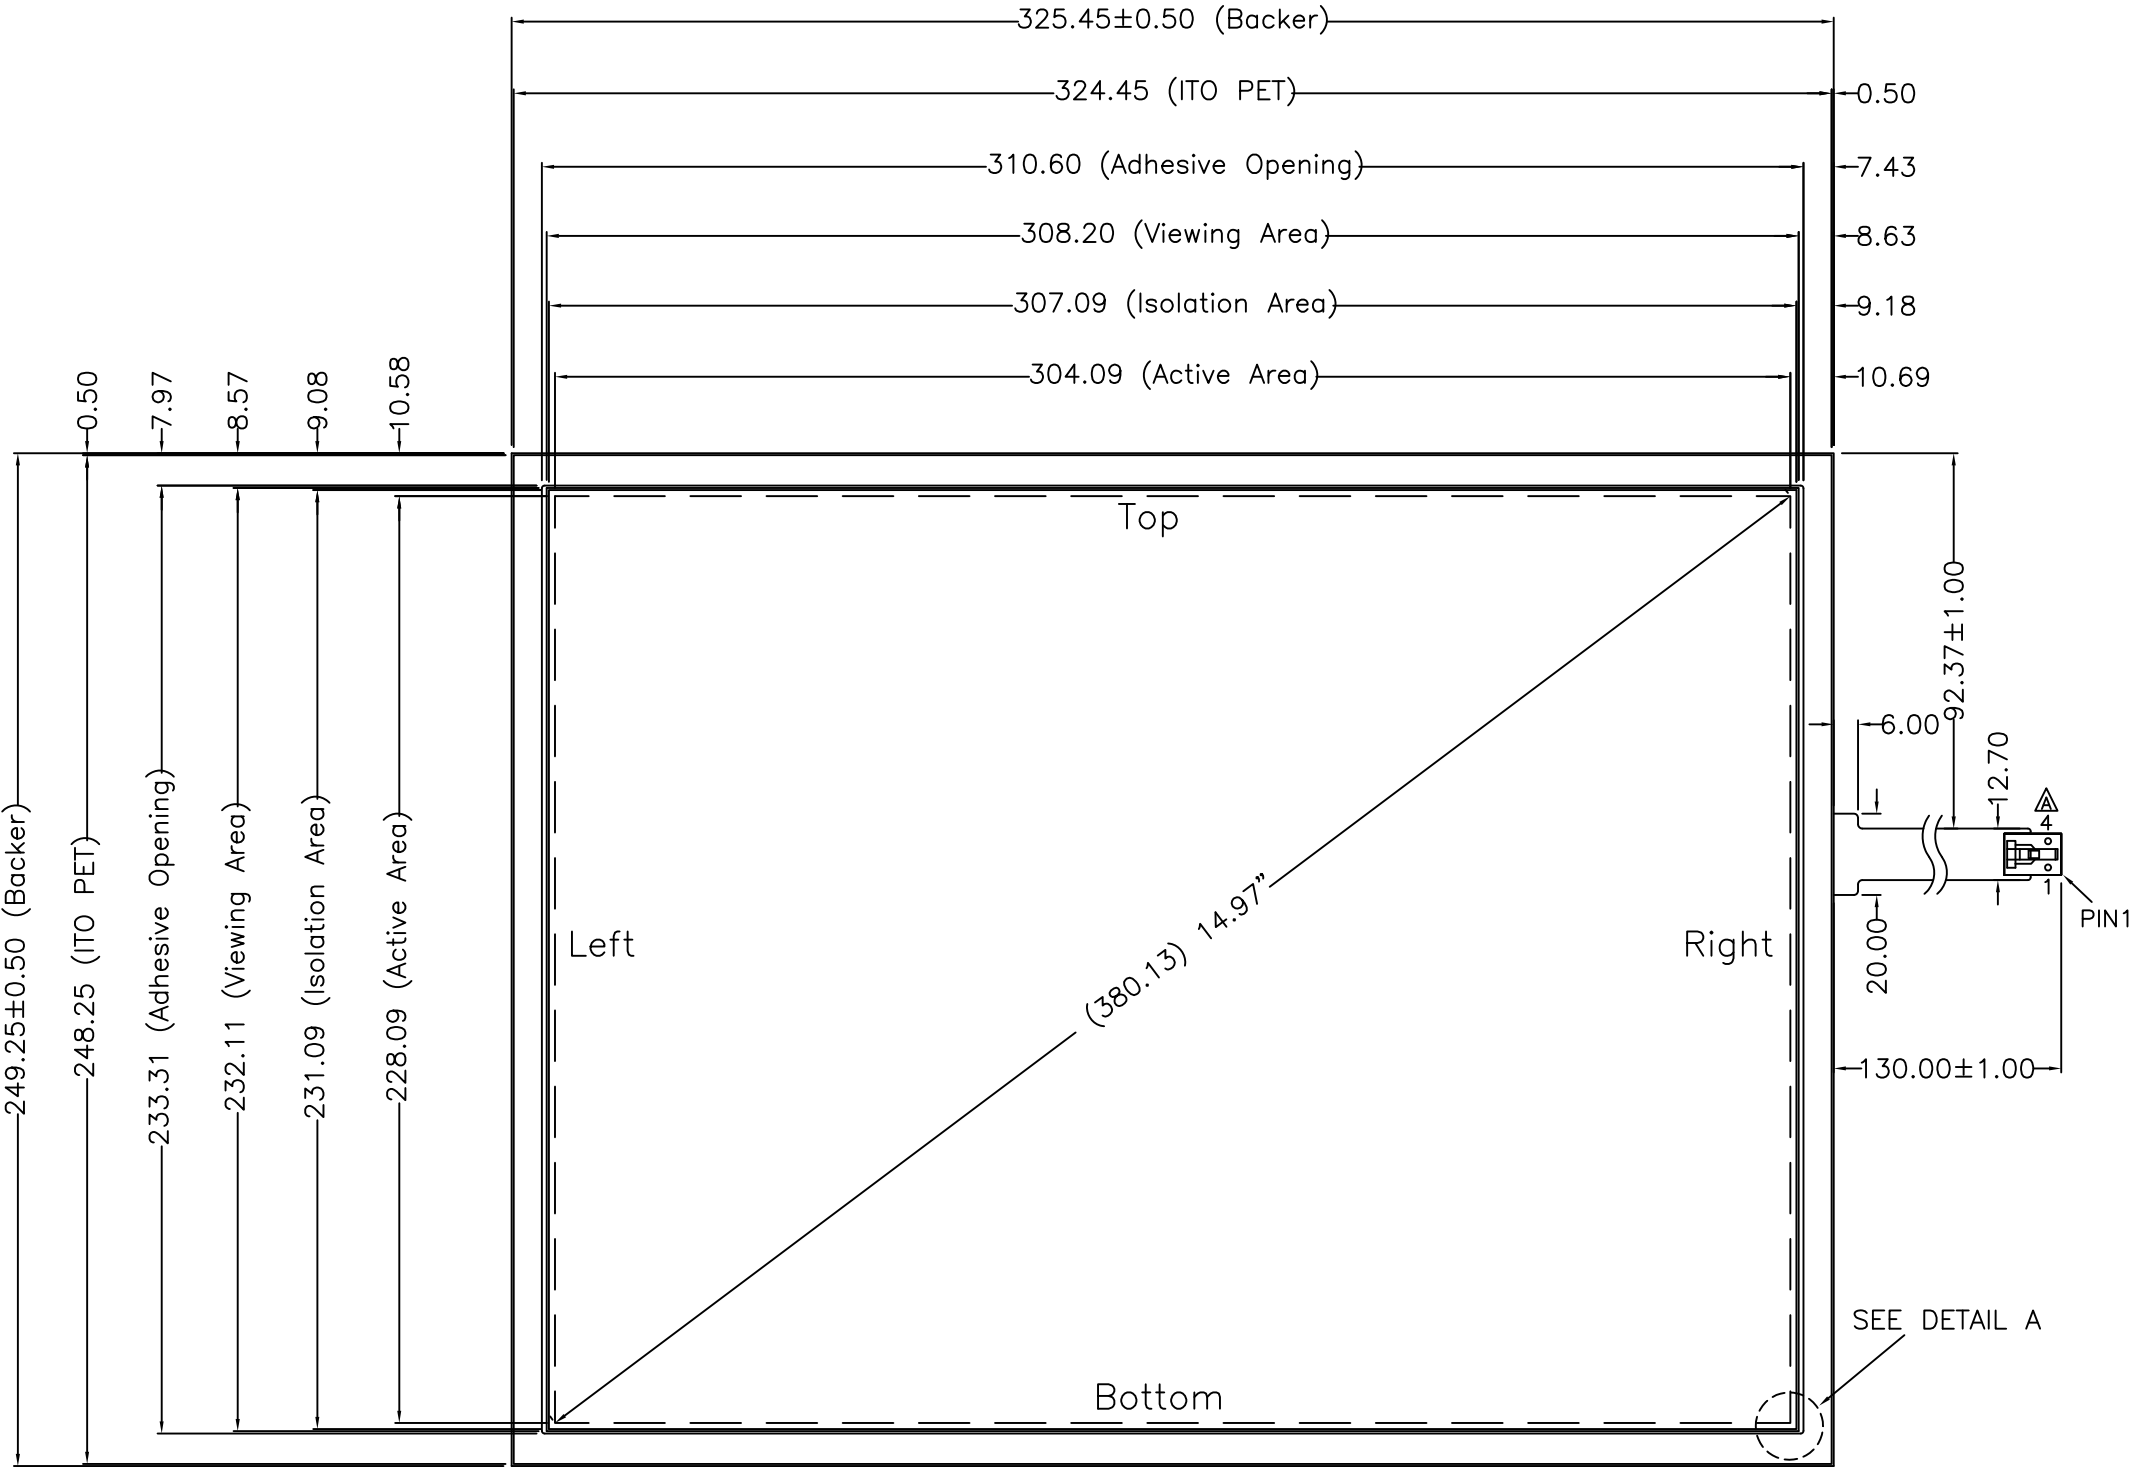

TOUCH SIDE VIEW

Pin #	Assignment
1	Bottom
2	Right
3	Top
4	Left

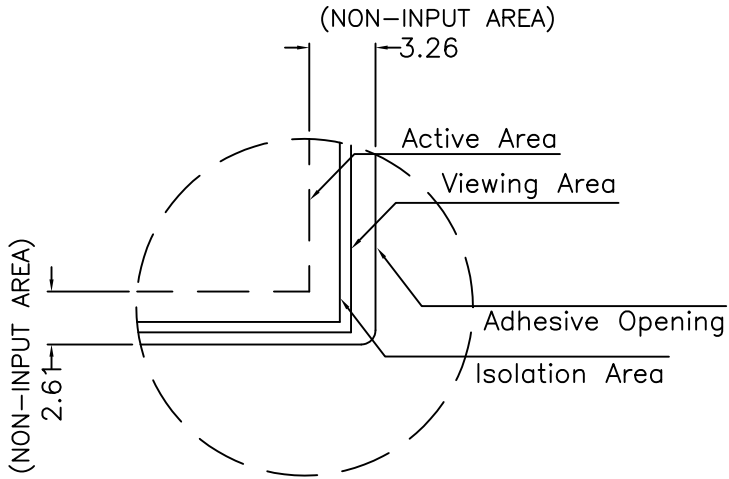

DETAIL A

- NOTES:
1. ITO GLASS THICKNESS : 1.80mm
 2. OVERALL THICKNESS : 2.10±0.20mm
 3. CONNECTOR AND PINOUT AS INDICATED
 4. FRONT SURFACE : ANTI-GLARE HARDCOAT
 5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
 - △6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C (WITH LATCH) CONNECTOR
 7. OTHER SPEC : SEE APPROVAL SHEET
- *BEFORE DESIGN PLEASE REFER TO THE INTEGRATION GUIDE



4 Pin 2.54mm Pitch
Female Connector

△

2.54

A	MAR 8, 2007	AMP-C Connector with latch Modify.	ALEX
NO.	DATE	DESCRIPTION	CHK
REVISION			
CHIEF OF DESIGN		APPROVED	Grace
ENGINEER		PROJECT MANAGER	
DRAWN BY	Bruce	DATE	May 15, 2012
SHT 1	OF 1	REV.	A

Apex Material Technology Corp.			
TOLERANCES UNLESS SPECIFIED		PROJECT NAME : 09543	
.X	± 0.50	DWG NO :09543-1-011	
.XX	± 0.50	SCALE: 1:1 UNIT: mm	
.XXX	± 0.30		
ANGULAR	.		