

Data Sheet

Customer: _____

Product: Multilayer Ceramic Capacitprs Epoxy Coated Radial Type

Size : R15 / R20 / R25

Issued Date: 14-Dec-2023

Edition: Ver. 3

Record of change

| Date | Ver. | Description | Page |
|------------|------|--|-------|
| 2016-08-28 | 1 | | |
| 2023-07-03 | 2 | Revised Test Freq. $C \leq 10\mu F \rightarrow 1\text{KHz}/1\text{V}$ & $C > 10\mu F \rightarrow 120\text{Hz}/0.5\text{V}$ | 2 |
| 2023-12-14 | 3 | Revised Part Number Designation · LEAD SHAPE · BODY SIZE & DIMENSION | 1 · 2 |
| | | | |

HITANO ENTERPRISE CORP.

7F-7, No. 3, Wu Chuan 1st Road, New Taipei Industrial Park,

New Taipei City, TAIWAN, R.O.C.

Tel: +886 2 2299 1331 (Rep.)

Fax: +886 2 2298 2466, 2298 2969

| Prepared by | Checked by | Approved by | Accepted by (customer) |
|-------------|-------------|-------------|------------------------|
| 14-Dec-2023 | 14-Dec-2023 | 14-Dec-2023 | |
| Hwa Wu | Andy Hsu | Arthur Su | |


Application :

NPO : Temperature compensation type, have little or no change in capacitance with variation in temperature. Hence, they are used in radio-frequency oscillators, precision timing circuits, ultra stable amplifiers, etc.

X7R/X5R: Temperature stable type for by-pass and decoupling in radio and television receivers, computers servo systems. Audio tone, and coupling, etc., where moderate capacitance variations are permissible and dissipation factor is not critical.

Z5U/Y5V: General type for by-pass and filtering applications.

Construction :

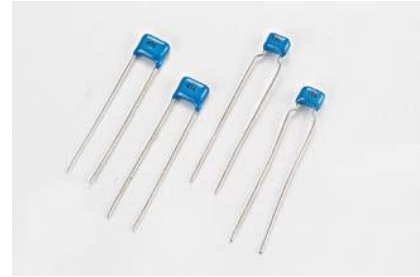

Part Number Designation:

| <u>R15</u> | <u>Z</u> | <u>104</u> | <u>M</u> | <u>1H</u> | <u>H</u> | <u>5</u> | - | <u>L</u> |
|------------|----------|------------------------|------------------------|-----------|------------|----------------------|---|---------------------|
| Size | T.C. | Capacitance-Code | Tolerance | Voltag | Lead shape | Lead space | | Package-Lead-length |
| R15 | N=NPO | Two significant | B: $\pm 0.10\text{pF}$ | 0J=6.3V | L=Straight | 2=2.54 \pm 0.8(mm) | | R=Tape/Reel |
| R20 | W=X7R | digits + No. of zeros. | C: $\pm 0.25\text{pF}$ | 1A=10V | Y=Inside | 5=5.08 \pm 0.8(mm) | | B=Tape/Box |
| R25 | X=X5R | example: | D: $\pm 0.50\text{pF}$ | 1C=16V | Crimp | | | 6=6 \pm 1mm |
| | Z=Z5U | 102=1000pF | F: $\pm 1\%$ | 1E=25V | H=High | | | L=25.4mm (Min.) |
| | Y=Y5V | 223=22000pF | G: $\pm 2\%$ | 1H=50V | seated | | | |
| | | 104=100000pF | J: $\pm 5\%$ | 1J=63V | | | | |
| | | | K: $\pm 10\%$ | 2A=100V | | | | |
| | | | M: $\pm 20\%$ | | | | | |
| | | | Z: -20% \sim +80% | | | | | |

1. LEAD SHAPE:

| | | |
|---------------------------------|---------------------------------|---------------------------------|
| | | |
| <p>R15 L2</p> | <p>R20 Y2</p> | |
| | | |
| <p>R15 H5</p> | <p>R20 H5</p> | <p>R25 L5</p> |

2. LEAD SPACE (F)

| CODE | LEAD SPACE (mm/inch) | |
|------|----------------------|-----------|
| 2 | 2.54±0.8 | 0.1±0.032 |
| 5 | 5.08±0.8 | 0.2±0.032 |

3. LEAD LENGTH (L)

| CODE | LEAD LENGTH | REMARK |
|------|-------------|-------------------------------------|
| 6 | 6mm±1mm | Specified lead length upon request. |
| L | 25mm (min) | |

4. BODY SIZE & DIMENSION

| Size code | Lead style available | Capacitance Range | | | | | Dimensions (mm) | | | | |
|-----------|----------------------|--|---|----------------------|----------------------|--|-----------------|-------|--------|--------|-------|
| | | NPO | X7R | Z5U | Y5V | X5R | W max | H max | T max. | d±0.05 | F±0.8 |
| R15 | L | 50V: 1.0pF -10nF 100V: 0.47-3900pF | 50V: 220pF-0.33uF 100V: 220pF-0.1uF | 50V: 1.0nF-0.22uF | 50V: 1.0nF-0.22uF | 16V 1.0uF-10.0uF 25V 1.0uF-4.7uF | 4.5 | 5.5 | 3.0 | 0.5 | 2.54 |
| | H | | | | | 4.5 | 7.0 | 3.0 | 0.5 | 5.08 | |
| R20 | Y | 25V: 22nF -100nF 50V: 10nF -100nF | 25V: 1.0uF -10.0uF 50V: 0.1uF -4.7uF | 50V: 0.22uF-1.0uF | 50V: 0.22uF-2.2uF | 6.3V 22.0uF-100uF 16V 3.3uF-47.0uF | 5.5 | 7.0 | 4.0 | 0.5 | 2.54 |
| | H | 100V: 1.0nF -10nF | 100V: 0.1uF -1.0uF | | | 25V 3.3uF-22.0uF 50V 1.0uF-10.0uF | | | | | |
| R25 | L | 50V: 150nF -220nF 100V: 12nF - 27nF | 50V: 6.8uF -22uF 100V: 1.2uF - 2.2uF | 50V: 1.0uF-4.7uF | 50V: 1.0uF-4.7uF | 6.3V 47.0uF-100uF 16V 10.0uF-22.0uF | 7.5 | 8.0 | 4.5 | 0.5 | 5.08 |

5. SPECIFICATIONS AND TEST METHODS :

Test Method :

(Capacitance & D.F. shall be measured at 25°C)

| Type | NPO | NPO/X7R/X5R | NPO/X7R/X5R |
|-----------|------------|---------------------|---------------------|
| Item | C ≤ 1000pF | Z5U/Y5V C ≤ 10uF | Z5U/Y5V C > 10uF |
| Frequency | 1.0 MHz | 1.0 KHz | 120 Hz |
| Voltage | 1.0 Vrms | 1.0 Vrms | 0.5 Vrms |

Dielectric strength 25°C (Flash Test)

- NPO, X7R, X5R: 300% rated voltage for 5 seconds with 50 mA. max charging current.
- Z5U and Y5V: 250% rated voltage for 5 seconds with 50 mA. max charging current

Temperature coefficient

- NPO: ± 30PPM/°C, -55°C to +125°C
- X7R: ± 15%, -55°C to +125°C
- X5R: ± 15%, -55°C to +85°C
- Z5U: +22%, -56%, +10°C to +85°C
- Y5V: +22%, -82%, -30°C to +85°C

Life Test :

(1000 hrs at max temp. applied with Flash test voltage Recovery for 24± 2 hrs)

- NPO: ≤ ± 3% at 200% rated voltage, 125°C
- X7R: ≤ ± 3% at 200% rated voltage, 125°C
- X5R: ≤ ± 3% at 200% rated voltage, 125°C
- Z5U: ≤ ± 3% at 200% rated voltage, 85°C
- Y5V: ≤ ± 3% at 200% rated voltage, 85°C

Dissipation Factor 25°C

NPO: 0.15% Max.

Z5U: 5% Max.

X7R/X5R:

| | |
|---------------|------|
| Rated voltage | Max. |
| ≥50V | 2.5% |
| 25V & 16V | 3.5% |
| 10V & 6.3V | 5.0% |

Y5V:

| | |
|---------------|------|
| Rated voltage | Max. |
| ≥50V | 5% |
| 25V & 16V | 7% |
| 10V & 6.3V | 10% |

Insulation Resistance after 60 sec., charging at rated voltage, 25°C, 55% R.H. max

- NPO: 100GΩ or 1000MΩ-uF whichever is less
- X7R : 10GΩ or 100MΩ-uF whichever is less
- X5R : 10GΩ or 100MΩ-uF whichever is less
- Z5U : 10GΩ or 100MΩ-uF whichever is less
- Y5V : 10GΩ or 1000MΩ-uF whichever is less