


- 说明:
1. 结构: film+glass+FPC  
film:亮面防牛 (0.188mm)  
glass:500 Ω /□ (1.1mm)  
tail:FPC (pitch=1.0mm)  
总厚度: 1.4±0.10mm
  2. 工作电压: 5.0V
  3. 电路等级: DC5V 1mA
  4. 绝缘阻抗: ≥20MΩ (25V DC)
  5. 线性: ≤1.5%
  6. 透光率: ≥80%
  7. 操作压力: 10-100g
  8. 使用寿命: ≥1,000,000次
  9. 工作环境: -10℃~+60℃, ≤90%RH
  10. 储存环境: -20℃~+70℃, ≤90%RH
  11. 未注尺寸公差按±0.20

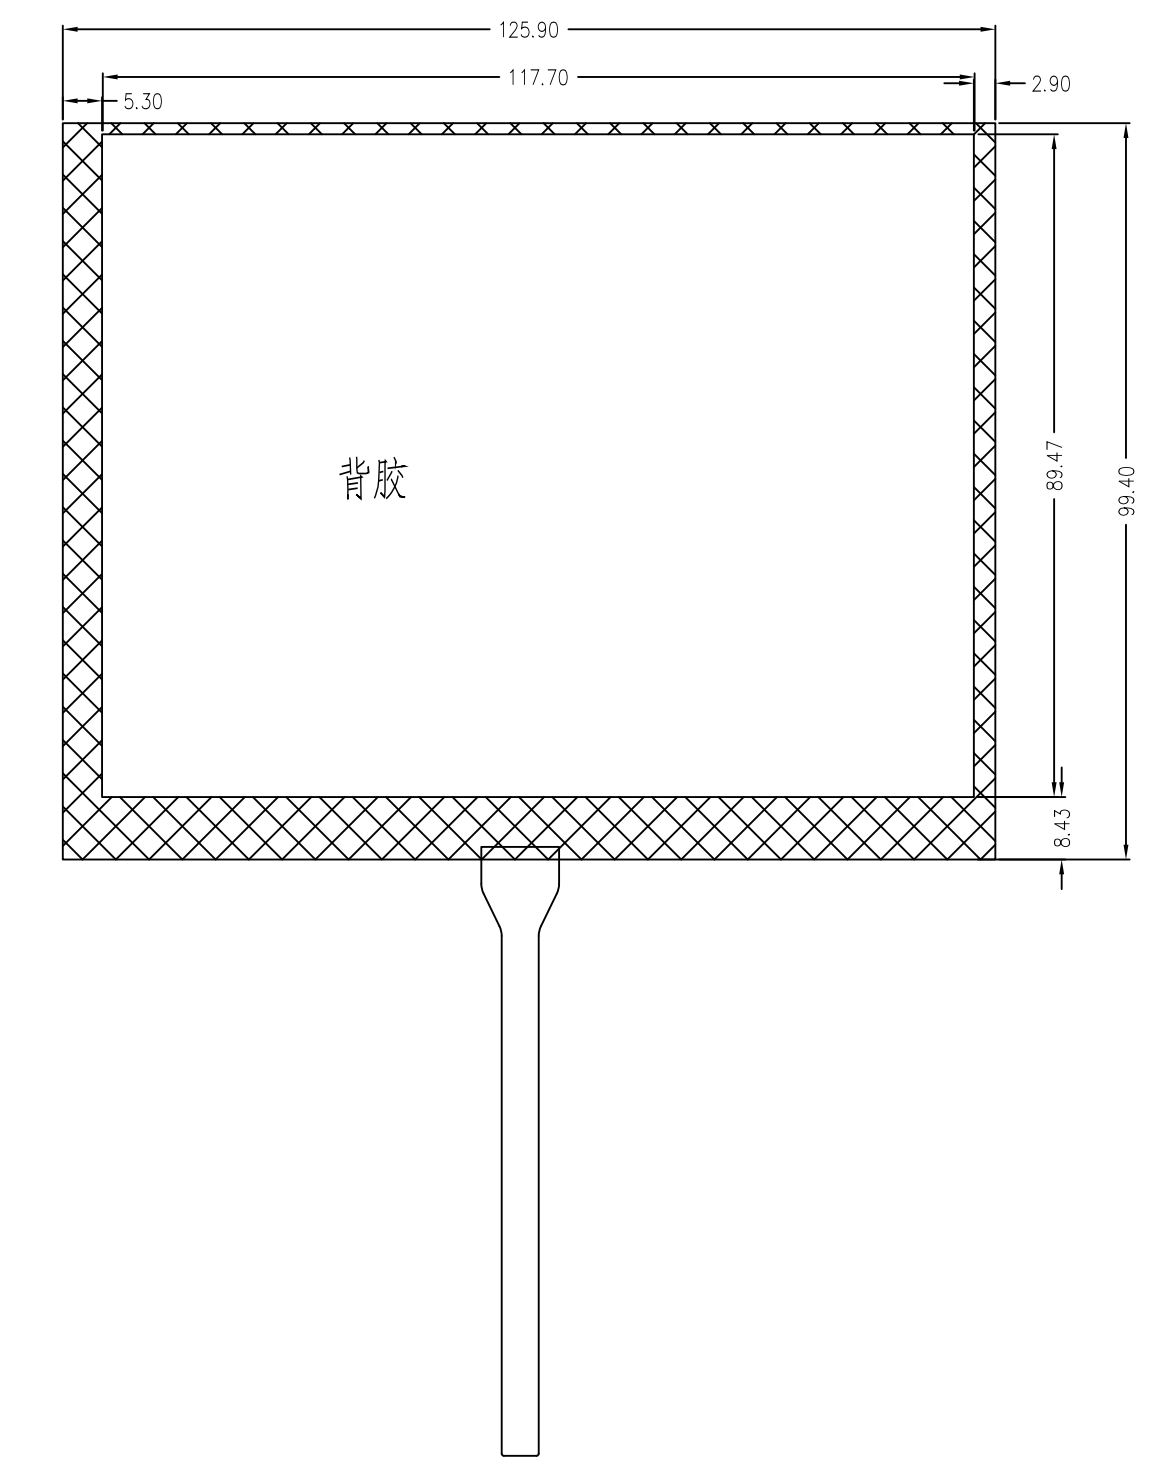

逻辑: DETAIL A top

	1	X-
	2	Y-
	3	X+
	4	Y+

客户确认: \_\_\_\_\_

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES MILLIMETERS TOLERANCES: ANGLES ±1° .XX" ±.02" .XXX" ±.005" OR 0.Xmm ±0.5mm 0.XXmm ±0.13mm			
客户型号:	DATE: DE-DATE	DRAWING NO.:	REV
设计: YJP	DATE: CH-DATE	LH-TPM154-5.6	REV
出图日期: 2013.07.31	DATE: APP-DATE	TITLE: TITLE	SHEET NO.: 01 1

TMGY
DESCRIPTION